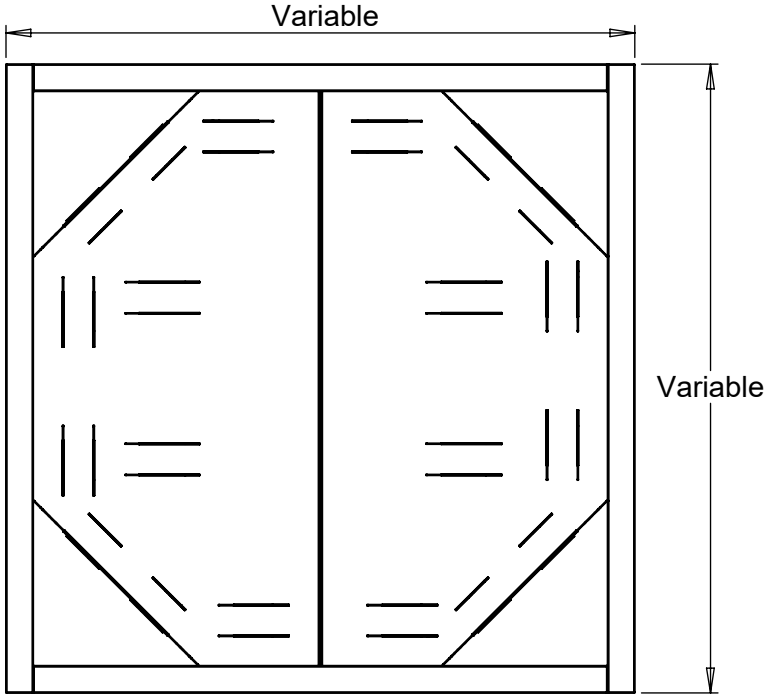


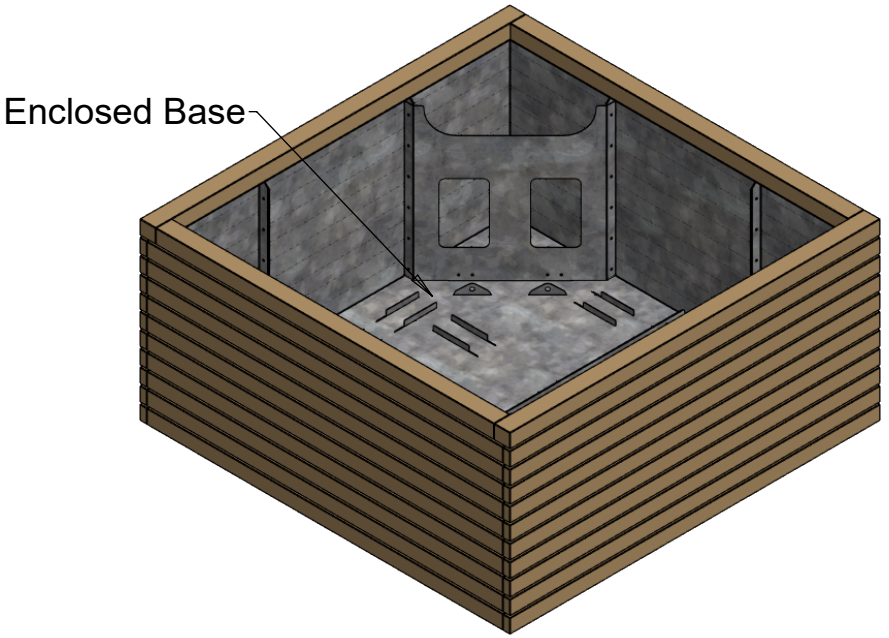


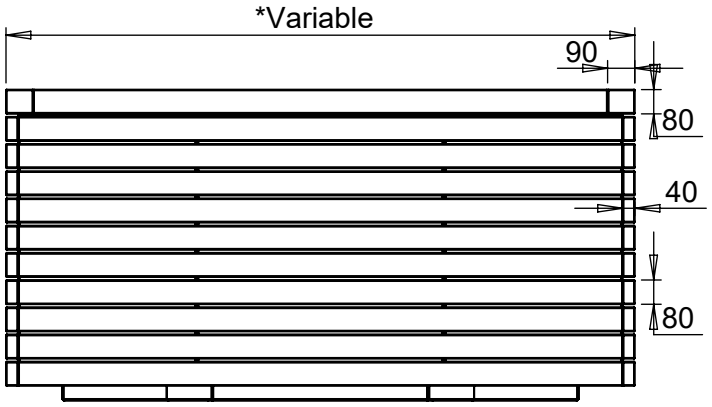

*Variable LxW: 580mm², 780mm², 980mm², 1280mm², 1580mm², 1880mm², 2080mm²

** Variable H: 580mm, 780mm , 980mm, 1180mm

| Quantity: | -- |
|---|---|

Agreed Sub-base Material: --

Lateral Support: --

| REVISIONS | | | Drawn | SA | PM | -- | Product: Corrio Planter Tub | LOGIC MANUFACTURED BESPOKE™ |
|---|---|---|---|---|---|---|---|---|
| REV | AMENDMENTS/ NOTE | DATE | Date | 30/09/2022 | | | | Logic Manufacture Bespoke™ Project: 01642 373400 specification@logic-bespoke.com |
| - | - | --/--/-- | Timber | Option Dependent | | | | |
| - | - | --/--/-- | Metal | Option Dependent | | | Project: -- | DWG. NO. P236-PLT-CO-001 |
| - | - | --/--/-- | Finish | Option Dependent | Weight | -- KG | | REV -- |
| - | - | --/--/-- | DO NOT SCALE DRAWINGS | LOGIC MANUFACTURED BESPOKE™ ALL RIGHTS RESERVED | | | | SIZE A4 |
| TOLERANCE: All dimensions tolerance +/- 5mm | | | | | | | | |

Timber Disclaimer: All timbers lose a degree of tanning, some more than others. Timber in an external environment is susceptible to cracking, shelling and moving due to the natural drying process, this does not take away from the durability of the product. In time timber may develop surface discolouration , this is caused by natural mould feeding on the tannins and should disperse as the timber dries and turns silver. Logic are not liable for this natural process and can not be held responsible for any of these natural processes. All products to be installed in conjuntion with the supplied installation guide, following the steps & guidance. All Logic products will bear some form of company branding. VELOX Rapid Edge™ - Patent Pending - GB2016654.2 - Registered Design - 90082149100001